


# Clear PVC Hose

## Kuri-Tec Clear PVC Hose

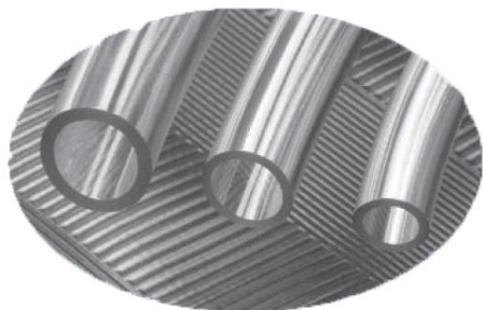

### Features:

- High gloss crystal clear appearance with glass smooth interior to reduce sediment buildup.
- Non-toxic blue tint to enhance clarity.
- NSF-51 and NSF-61 certified material.
- Self-extinguishing.
- Compound hardness 73 ±3 Shore "A".

Fabco clear vinyl tubing is constructed of a Clear non-toxic food and crystal clear PVC compound which makes it ideal for beverage grade PVC tubing. It is formulated with ingredients in compliance with applicable FDA(03) requirements, meets USDA(17), 3A(01), NSF(13), UL(16), RoHS(15) and USP(18) Class VI criteria. The service temperature Range: is between +25°F (-4°C) and +150°F (+65°C). Hose clamps and fittings are also available. See index for types and locations.

### Applications:

- Tubing for laboratories.
- Water distillation lines.
- Deionized water systems.
- Air conditioning and refrigeration drainage.
- Air lines and bottling plants.
- Beverage dispensing units.
- Ice making machines.
- High efficiency furnace drainage.
- Transfer of weak chemicals & acids.

PART NUMBER	NOMINAL I.D.	NOMINAL O.D.	WALL THICKNESS	WP/PSI 68°F (20°C)	STANDARD LENGTH (FT)	APPROX. WT PER ROLL (LBS.)
CVT037	1/8"	1/4"	1/16"	65	100	2.0
K0100304	3/16"	1/4"	1/32"	50	100	1.2
CVT051	3/16"	5/16"	1/16"	55	100	2.7
K0100306	3/16"	3/8"	3/32"	60	100	4.5
CVT071	1/4"	3/8"	1/16"	55	100	3.4
CVT073	1/4"	7/16"	3/32"	58	100	5.5
CVT074	1/4"	1/2"	1/8"	60	100	8.0
CVT092	5/16"	7/16"	1/16"	50	100	4.0
K0100508	5/16"	1/2"	3/32"	55	100	6.5
K0100509	5/16"	9/16"	1/8"	60	100	9.4
CVT107	3/8"	1/2"	1/16"	45	100	4.7
CVT108	3/8"	9/16"	3/32"	50	100	7.5
K0100610	3/8"	5/8"	1/8"	55	100	10.7
K0100709	7/16"	9/16"	1/16"	35	100	6.0
CVT135	1/2"	5/8"	1/16"	30	100	6.0
CVT137	1/2"	11/16"	3/32"	40	100	9.5
CVT138	1/2"	3/4"	1/8"	45	100	13.4
K0101012	5/8"	3/4"	1/16"	26	100	8.2
CVT164	5/8"	13/16"	3/32"	35	100	11.6
CVT165	5/8"	7/8"	1/8"	40	100	16.1
CVT180	3/4"	1"	1/8"	35	100	18.8
K0101218	3/4"	1 1/8"	3/16"	40	100	30.0
CVT185	3/4"	1-1/4"	1/4"	45	100	42.9
K0101418	7/8"	1 1/8"	1/8"	30	100	21.4
K0101420	7/8"	1 1/4"	3/16"	35	100	34.1
CVT210	1"	1-1/4"	1/8"	25	100	24.1
CVT213	1"	1-3/8"	3/16"	30	100	38.2
K0101624	1"	1 1/2"	1/4"	35	100	53.6
K0102024	1-1/4"	1 1/2"	1/8"	20	50	14.8
CVT241	1-1/4"	1-5/8"	3/16"	30	50	23.1
K0102028	1-1/4"	1 3/4"	1/4"	40	50	32.2
K0102430	1 1/2"	1 7/8"	3/16"	30	50	27.1
K0102432	1 1/2"	2"	1/4"	35	50	37.5
K0103240	2"	2 1/2"	1/4"	35	50	48.2

### Notes:

- Working Pressure decreases as temperature increases.
- Pressure ratings can only be obtained with proper coupling procedures.
- Use of compression fittings with non-reinforced PVC tubing is not recommended. Hose claims involving use of these fittings will be disallowed.