


Fabco Flex

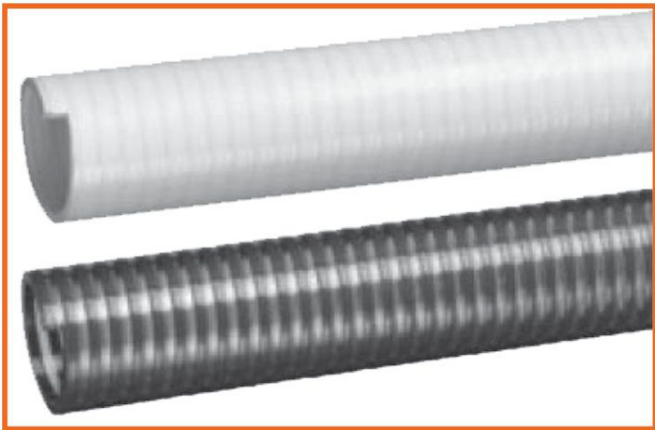

PVC has been optimized to ensure the hose remains tough and flexible, and is more flexible than the current hose on the market. Our spa hose replaces rigid pipe for pools, spa and hot tub installations ideal for working in confined areas.

TEMPERATURE

-5°C to + 60°C (23F to 140F)
Actual Service Temperature range is application dependent.

APPLICATION:

- Pool – Above Ground
- Pool – Inground
- Spa – Hot Tub
- Jetted or Aerated Tubs
- Landscaping & Ponds
- Use with PVC Solvent Cements

FEATURES:

- Lightweight
- Full Vacuum
- Ultra Flexible
- White PVC Construction
- Virgin Materials
- Smooth Bore Construction
- Tight Tolerances

PART #	IPS SIZE (IN)	OD		MAX. WORKING PRESSURE (PSI)		STD LENGTH (FT)	APPROX. WEIGHT (LBS/FT)
		(IN)	(MM)	@ 68°F	@ 104°F		
PFH050A	1/2"	0.850	21.50	100	70	100	0.14
PFH075A	3/4"	1.053	26.75	100	70	100	0.22
PFH100A	1"	1.320	33.53	100	70	100	0.31
PFH150A	1 1/2"	1.904	48.36	70	50	100	0.48
PFH200A	2"	2.381	60.48	70	50	100	0.61
PFH300A	3"	3.500	89.00	65	40	50	1.20

