Koflo Clear PVC Static Mixers, Series 308



Other Applications:

- · Admixing of water treatment chemicals
- pH control
- Chlorination and ozonation
- · Process control sampling

In response to a growing need for high quality PVC static mixers at a lower price, Koflo developed the Series 308 PVC Static Mixer. This unit is a clear PVC static mixer, which unlike other static mixers, allows for a visual inspection of the mixing process. All Series 308 static mixers are made in standard 6 element and 12 element configurations. Additionally, all PVC static mixers are edge sealed to the inside of the housing. The advantages of edge sealing are twofold. Not only does edge sealing increase mixing efficiency, but this bonding method also increases the structural integrity of the entire mixer. All mixers come standard with male NPT threads. Sizes 3/8"- 2" are in stock for immediate delivery.

One of the primary uses of the Series 308 static mixers is in the dilution of polymers and flocculants. With proper blending, it is quite common to recover the cost of a mixer in a relatively short period of time, due to the lower chemical costs associated with better mixing.

MODEL NUMBER	PIPE DIA. MNPT ENDS	NUMBER OF ELEMENTS	LENGTH	WEIGHT	MAX. WORKING PRESSURE (PSI @75 °F)	TYPICAL FLOW (GPM)	PRESSURE LOSS (PSI)
TECHNICAL SPEC	SIFICATIONS						
3/8-40C-4-6-2	3/8"	6	6 1/2"	1.3 OZ	310	.4-3	.25-11.25
3/8-40C-4-12-2	3/8"	12	11"	2.1 OZ	310	.4-3	.50-22.5
1/2-40C-4-6-2	1/2"	6	7″	2.1 OZ	300	.65-5	.25-10
1/2-40C-4-12-2	1/2"	12	12"	3.3 OZ	300	.65-5	.50-20
3/4-40C-4-6-2	3/4"	6	9″	3.7 OZ	240	1.5-12	.25-11
3/4-40C-4-12-2	3/4"	12	15"	5.8 OZ	240	1.5-12	.50-22
1-40C-4-6-2	1"	6	11"	6.5 OZ	220	2.5-16	.30-11.75
1-40C-4-12-2	1"	12	18"	9.9 OZ	220	2.5-16	.60-23.5
1.25-40C-4-6-2	1 1/4"	6	14"	12.2 OZ	180	4-32	.25-13.5
1.25-40C-4-12-2	1 1/4"	12	25"	18.3 OZ	180	4-32	.50-27
1.5-40C-4-6-2	1 1/2"	6	15"	14.8 OZ	170	6-40	.25-12.25
1.5-40C-4-12-2	1 1/2"	12	28″	25.4 OZ	170	6-40	.50-24.5
2-40C-4-6-2	2"	6	19"	25 OZ	140	9-60	.25-9.25
2-40C-4-12-2	2"	12	35"	43 OZ	140	9-60	.50-18.5


Note:

• Also available in gray PVC, PVDF, PFA, Fiberglass & Stainless Steel




Static Mixers

Koflo Static Mixer Flanged Schedule 80

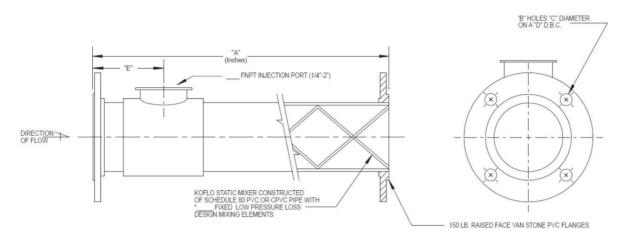

	SIZE	"A" *NUMBER OF ELEMENTS					"B"	"C"	"D"	"E"	PORT SIZE
		2	3	4	5	6					(FNPT)
	1	12	12	12	13	13	4	5/8"	3 1/8"	4"	1/2"
	1 1/2"	14	14	16	18	19	4	5/8"	3 7/8"	5″	1/2"
	2	15	16	19	21	23	4	3/4"	4 3/4"	5"	3/4"
	2 1/2"	17	19	22	25	27	4	3/4"	5 1/2"	6"	3/4"
	3	21	23	27	31	33	4	3/4"	6"	7"	3/4"
	4	22	27	32	37	41	8	3/4"	7 1/2"	7"	3/4"
	6	27	33	41	49	56	8	7/8"	9 1/2"	8"	1"
	8	32	43	53	63	73	8	7/8"	11 3/4"	9″	1"
	10	39	52	66	79	90	12	1"	14 1/4"	12"	1"
	12	45	60	76	90	105	12	1"	17"	12"	1"

Koflo Static Mixer Clear PVC Schedule 40

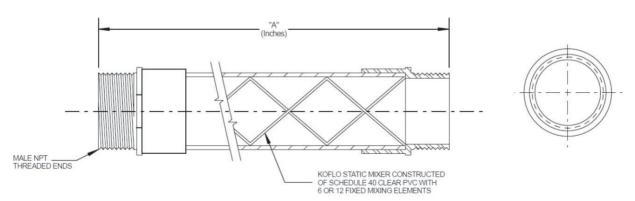

SIZE	6 ELEMENT MODEL NUMBER	"A" & ELEMENT	12 ELEMENT MODEL NUMBER	"A" 12 ELEMENT
3/8"	3/8-40C-4-6-2	6 1/2	3/8-40C-4-12-2	11
1/2"	1/2-40C-4-6-2	7	1/2-40C-4-12-2	12
3/4"	3/4-40C-4-6-2	9	3/4-40C-4-12-2	15
1"	1-40C-4-6-2	11	1-40C-4-12-2	18
1 1/4"	1.25-40C-4-6-2	14	1.25-40C-4-12-2	25
1 1/2"	1.5-40C-4-6-2	15	1.5-40C-4-12-2	28
2"	2-40C-4-6-2	19	2-40C-4-12-2	35